



Le brache piatte ad anello sono brache in poliestere senza punti fissi di aggancio, idonee per sollevare e movimentare fasci di prodotti lunghi in metallo (tubi, trafilati, profili).

- Realizzate con nastri tessuti di alta qualità.
- Cuciture eseguite scrupolosamente da personale qualificato con macchine a controllo numerico.

Caratteristiche tecniche

- Conformi a DM2006/42/CE, EN1492-1.
- Portata (WLL) fino a 24 ton.
- Coefficiente di sicurezza 7:1.
- Lunghezza MIN= 1 m.
- Lunghezza MAX= 50 m.
- Personalizzabili per portata (WLL), lunghezza, colore.
- Possibilità di serigrafia personalizzata.
- Targhetta di prodotto in robusto PVC con le istruzioni operative.

Endless webbing slings are economical and adaptable polyester slings with no fixed wear points. They are suitable to lift and move tubes, pipes and long metal parts.


- Made of high-quality woven webbings.
- Stitching scrupulously made by qualified workers by computer numerical control machines.

Technical features

- Compliant to: DM2006/42/CE, EN1492-1.
- WLL up to 24 ton.
- Safety factor 7:1.
- MIN Length= 1 m.
- MAX Length= 50 m.
- Special lengths and load capacities (WLL).
- Customer name / logo printing.
- Label made of strong PVC with safety instruction.

L = LUNGHEZZA
LENGTH

S = LX2 = SVILUPPO CIRCOLARE
CIRCLE LENGTH

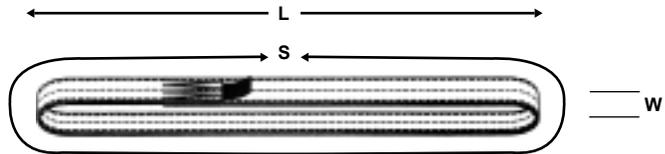

Colour	WLL	Code
Green	2.000 kg	AND200
Grey	4.000 kg	AND400
Red	5.000 kg	AND500
Brown	6.000 kg	AND600
Blue	8.000 kg	AND800

W	TIRO DIRETTO Straight lift			CAPPIO Choked lift	CANESTRO Basket lift		
	0°<β<7°	7°<β<45°	45°<β<60°		0°<β<7°	7°<β<45°	45°<β<60°
	1	0,7	0,5	0,8	2	1,4	1
mm	kg	kg	kg	kg	kg	kg	kg
50	2.000	1.400	1.000	1.600	4.000	5.600	2.000
60	4.000	2.800	2.000	3.200	8.000	5.600	4.000
75	5.000	3.500	2.500	4.000	10.000	7.000	5.000
90	6.000	4.200	3.000	4.800	12.000	8.400	6.000
120	8.000	5.600	4.000	6.400	16.000	11.200	8.000

COME ORDINARE

HOW TO ORDER

Aggiungere al codice principale, il relativo codice lunghezza:

Add to the main code, the specific length code

ESEMPIO:

WLL 2000 kg, L = 1m **AND200-0100**

L	Lunghezza della braca Sling length	0,5 m	1 m	1,5 m	2 m
	Sviluppo circolare della braca Sling Circle Length	1 m	2 m	3 m	4 m
	Codice lunghezza Length code	0050	0100	0150	0200